



**Two-dimensional
parameterisation for
Flux Footprint
Predictions**

N. Kljun et al.

This discussion paper is/has been under review for the journal Geoscientific Model Development (GMD). Please refer to the corresponding final paper in GMD if available.

The simple two-dimensional parameterisation for Flux Footprint Predictions FFP

N. Kljun¹, P. Calanca², M. W. Rotach³, and H. P. Schmid⁴

¹Department of Geography, Swansea University, Swansea, United Kingdom

²Agroscope, Institute for Sustainability Sciences, Zurich, Switzerland

³Institute of Atmospheric and Cryospheric Sciences, Innsbruck University, Innsbruck, Austria

⁴KIT, Institute of Meteorology and Climate Research, Garmisch-Partenkirchen, Germany

Received: 2 July 2015 – Accepted: 11 August 2015 – Published: 24 August 2015

Correspondence to: N. Kljun (n.kljun@swansea.ac.uk)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

Flux footprint models are often used for interpretation of flux tower measurements, to estimate position and size of surface source areas, and the relative contribution of passive scalar sources to measured fluxes. Accurate knowledge of footprints is of crucial importance for any upscaling exercises from single site flux measurements to ecosystem or regional scale. Hence, footprint models are ultimately also of considerable importance for improved greenhouse gas budgeting. With increasing numbers of flux towers within large monitoring networks such as FLUXNET, ICOS, NEON, or AMERIFLUX, and with increasing temporal range of observations from such towers (order of decades) and availability of airborne flux measurements, there has been an increasing demand for reliable footprint estimation. Even though several sophisticated footprint models have been developed in recent years, most are still not suitable for application to long time series, due to their high computational demands. Existing fast footprint models, on the other hand, are based on Surface Layer theory and hence are of restricted validity for real case applications.

To remedy such shortcomings, we present the two-dimensional Flux Footprint Parameterisation, FFP, based on a novel scaling approach for the crosswind distribution of the flux footprint and on an improved version of the footprint parameterisation of Kljun et al. (2004b). Compared to the latter, FFP now provides not only the extent, but also the width and shape of footprint estimates, and explicit consideration of the effects of the surface roughness length. The footprint parameterisation has been developed and evaluated using simulations of the backward Lagrangian stochastic particle dispersion model LPDM-B (Kljun et al., 2002). Like LPDM-B, the parameterisation is valid for a broad range of boundary layer conditions and measurement heights over the entire planetary boundary layer. Thus it can provide footprint estimates for a wide range of real case applications.

The new footprint parameterisation requires inputs that can be easily determined from, for example, flux tower measurements or airborne flux data. FFP can be applied

GMDD

8, 6757–6808, 2015

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



to data of long-term monitoring programmes as well as be used for quick footprint estimates in the field, or for designing new sites.

1 Introduction

Flux footprint models are used to describe the spatial extent and position of the surface area that is contributing to a turbulent flux measurement at a specific point in time, for specific atmospheric conditions and surface characteristics. They are hence very important tools when it comes to interpretation of flux measurements of passive scalars, such as the greenhouse gases carbon dioxide (CO₂), water vapour (H₂O), or methane (CH₄).

In recent years, the application of footprint models has become a standard task in analysis of measurements from flux towers (e.g., Aubinet et al., 2001; Rebmann et al., 2005; Nagy et al., 2006; Göckede et al., 2008; Mauder et al., 2013) or airborne flux measurements (Kustas et al., 2006; Mauder et al., 2008; Hutjes et al., 2010; Metzger et al., 2012) of inert (i.e., long-lived) greenhouse gases. Information about the sink and source location is even more crucial for towers in heterogeneous or disturbed landscapes (e.g., Sogachev et al., 2005), a topical study area in recent times. Schmid (2002) showed that the use of the footprint concept has been increasing exponentially since 1972. Since then, footprint models have been used for planning and design of new flux towers and have been applied to most flux tower observations around the globe, to support the interpretation of such measurements.

Long-term and short-term flux observations are exposed to widely varying atmospheric conditions and their interpretation therefore involves an enormous amount of footprint calculations. Despite the widespread use of footprint models, the selection of a suitable model still poses a major challenge. Complex footprint models based on Large Eddy Simulations (LES; e.g., Luhar and Rao, 1994; Leclerc et al., 1997; Steinfeld et al., 2008; Wang and Davis, 2008), Eulerian models of higher order turbulence closure (e.g., Sogachev and Lloyd, 2004), or Lagrangian stochastic particle dispersion

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



ary Layer. However, the parameterisation of Kljun et al. (2004b) comprises only the crosswind-integrated footprint, i.e. it describes the footprint function's upwind extent but not its width.

In recent time, footprint model outputs have frequently been combined with surface information, such as remote sensing data (e.g., Schmid and Lloyd, 1999; Kim et al., 2006; Li et al., 2008; Barcza et al., 2009; Chasmer et al., 2009; Sutherland et al., 2014). As remote sensing data is increasingly available in high spatial resolution, a footprint often covers more than one pixel of remote sensing data; hence there is a need for information of the crosswind spread of the footprint. Similar to FSAM (Schmid, 1994), the footprint model of Kormann and Meixner (2001) includes dispersion in crosswind direction. Detto et al. (2006) provided a crosswind extension of the footprint model of Hsieh et al. (2000). However, all these models are of limited validity restricted to measurements close to the surface. For more details on their validity and restrictions, and for a comprehensive review on existing footprint techniques and approaches the reader is referred to Schmid (2002), Vesala et al. (2008), or Leclerc and Foken (2014).

This study addresses the issues and shortcomings mentioned above. We present the new footprint parameterisation FFP, with improved footprint predictions for elevated measurement heights in stable stratifications. The influence of the surface roughness has been implemented into the scaling approach explicitly. Further and most importantly, the new parameterisation describes also the crosswind spread of the footprint and hence, it is suitable for many practical applications. Like all footprint models that do not simulate the full time- and space-explicit flow, FFP implicitly assumes stationarity over the eddy-covariance integration period (typically 30 min) and horizontal homogeneity of the flow (but not of the scalar source/sink distribution). As in Kljun et al. (2004b), the new parameterisation is based on a scaling approach of flux footprint results of the thoroughly tested Lagrangian footprint model LPDM-B (Kljun et al., 2002). Its most important scaling variables are readily available through common turbulence measurements that are typically performed at flux tower sites.

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



2 Footprint dataset

Mathematically, the flux footprint, f , is the transfer function between sources or sinks of passive scalars at the surface, Q_c , and the turbulent flux, F_c , measured at a receptor at height z_m (e.g., Pasquill and Smith, 1983; Schmid, 2002). We define a local footprint coordinate system, where the receptor is mounted above the origin (0, 0) and positive x indicates upwind distance, such that

$$F_c(0, 0, z_m) = \int_{\mathfrak{R}} Q_c(x, y) f(x, y) dx dy, \quad (1)$$

where \mathfrak{R} denotes the integration domain. As the footprint function is always specific to a given measurement height, the vertical reference in f is neglected, for simplicity. It follows that the footprint function is proportional to the flux increment arising from a single unit point source or sink, Q_u , i.e.,

$$f(x, y) = \frac{F_c(0, 0, z_m)}{Q_u(x, y)}. \quad (2)$$

As F_c is a flux density (per unit area) and Q_u is a source or sink integrated over a unit area, the two-dimensional footprint function has the dimension of [1/area]. Assuming that crosswind turbulent dispersion can be treated independently from vertical or streamwise transport, the footprint function can be expressed in terms of a crosswind-integrated footprint, $\overline{f^y}$, and a crosswind dispersion function, D_y , (see, e.g., Horst and Weil, 1992)

$$f(x, y) = \overline{f^y}(x) D_y. \quad (3)$$

Derivation and evaluation of the footprint parameterisation are based on footprint calculations using LPDM-B (Kljun et al., 2002). LPDM-B is a footprint model of the

GMDD

8, 6757–6808, 2015

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



of the roughness elements, approximated by $h_{rs} = 10 z_0$ (Grimmond and Oke, 1999)]. Here, we use $z_* = 2.75 h_{rs}$.

As expected for such a broad range of scenarios, the resulting footprints of LPDM-B simulations show a vast range of extents and sizes. Fig. 1 depicts this range by means of peak location of the footprints and their extent, when integrated from their peak to 80% contribution of the total footprint (cf. Sect. 5.3). For example, the 80% footprint extents ranged from a few tens to a few hundreds of meters upwind of the tower location for the lowest measurement heights. For the highest measurements, the 80% footprints ranged up to 270 km.

An additional set of 27 LPDM-B simulations was run for independent evaluation of the footprint parameterisation. Measurement heights that are typical for flux tower sites were selected for this evaluation set, with boundary layer conditions again ranging from convective to stable. Table 2 lists the characteristics of these additional scenarios.

3 Scaling of footprints

The vast range in footprint sizes presented above clearly manifests that it is not practical to fit a single footprint parameterisation to all real-scale footprints. An additional step of footprint scaling is hence needed, with the goal of deriving a universal non-dimensional footprint. Ideally, such dimensionless footprints collapse to a single shape or narrow ensemble of curves. We follow a method that borrows from Buckingham Π dimensional analysis (e.g., Stull, 1988), using dimensionless Π -functions to scale the footprint estimates of LPDM-B, similar to Kljun et al. (2004b), and scale the two components of the footprint, the crosswind-integrated footprint and its crosswind dispersion (Eq. 3), in two separate steps.

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



3.1 Scaled crosswind-integrated footprint

As in Kljun et al. (2004b), we choose scaling parameters relevant for the crosswind-integrated footprint function, $\overline{f^y}(x)$. The first choice is the receptor height, z_m , as experience shows that the footprint (both its extent and footprint function value) is most strongly dependent on this height. Secondly, as indicated in Eq. (2), the footprint is proportional to the flux at height z_m . We hence formulate another scaling parameter based on the common finding that turbulent fluxes decline approximately linearly through the planetary boundary layer, from their surface value to the boundary layer height, h , where they disappear (e.g., Stull, 1988). Lastly, as a transfer function in turbulent boundary layer flow, the footprint is directly affected by the mean wind velocity at the measurement height, $\overline{u}(z_m)$, as well as by the surface shear stress, represented by the friction velocity, u_* . The well-known diabatic Surface Layer wind speed profile (e.g., Stull, 1988) relates $\overline{u}(z_m)$ to the roughness length, z_0 , and the integrated form of the non-dimensional wind shear, Ψ_M , that accounts for the effect of stability (z_m/L) on the flow.

With the above scaling parameters we form four dimensionless Π groups as

$$\begin{aligned}\Pi_1 &= \overline{f^y} z_m \\ \Pi_2 &= \frac{x}{z_m} \\ \Pi_3 &= \frac{h - z_m}{h} = 1 - \frac{z_m}{h} \\ \Pi_4 &= \frac{\overline{u}(z_m)}{u_*} k = \ln\left(\frac{z_m}{z_0}\right) - \Psi_M\end{aligned}\quad (4)$$

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



where $k = 0.4$ is the von Karman constant. We use Ψ_M as suggested by Högström (1996):

$$\Psi_M = \begin{cases} -5.3 \frac{z_m}{L} & \text{for } L > 0, \\ \ln\left(\frac{1+\chi^2}{2}\right) + 2\ln\left(\frac{1+\chi}{2}\right) - 2\tan^{-1}(\chi) + \frac{\pi}{2} & \text{for } L < 0. \end{cases} \quad (5)$$

with $\chi = (1 - 19 z_m/L)^{1/4}$. In principle, Ψ_M is based on Monin-Obukhov similarity and valid within the Surface Layer. Hence special care was taken in testing this scaling approach for measurements outside the Surface Layer (see below). In contrast to Kljun et al. (2004b), the present study incorporates the roughness length directly in the scaling procedure: high surface roughness (i.e., large z_0) enhances turbulence relative to the mean flow, and thus shortens the footprints. Here, z_0 is either directly used as input parameter or is implicitly included through the fraction of $\bar{u}(z_m)/u_*$.

The non-dimensional form of the crosswind-integrated footprint, F^{y*} , can be written as a yet unknown function φ of the non-dimensional upwind distance, X^* . Thus $F^{y*} = \varphi(X^*)$, with $X^* = \Pi_2 \Pi_3 \Pi_4^{-1}$ and $F^{y*} = \Pi_1 \Pi_3^{-1} \Pi_4$, such that

$$X^* = \frac{x}{z_m} \left(1 - \frac{z_m}{h}\right) \left(\frac{\bar{u}(z_m)}{u_*} k\right)^{-1} \quad (6)$$

$$= \frac{x}{z_m} \left(1 - \frac{z_m}{h}\right) \left(\ln\left(\frac{z_m}{z_0}\right) - \Psi_M\right)^{-1} \quad (7)$$

$$F^{y*} = \bar{f}^y z_m \left(1 - \frac{z_m}{h}\right)^{-1} \frac{\bar{u}(z_m)}{u_*} k \quad (8)$$

$$= \bar{f}^y z_m \left(1 - \frac{z_m}{h}\right)^{-1} \left(\ln\left(\frac{z_m}{z_0}\right) - \Psi_M\right). \quad (9)$$

As a next step, the above scaling procedure is applied to all footprints of Scenarios 1 to 8 (Table 1) derived by LPDM-B. Despite the huge range of footprint extents

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



(Fig. 1), the resulting scaled footprints collapse into an ensemble of footprints of very similar shape, peak location, and extent (Fig. 2). Hence the new scaling procedure for crosswind-integrated flux footprints proves to be successful across the whole range of simulations, including the large range of surface roughness lengths and stability regimes.

3.2 Scaled crosswind dispersion

Crosswind dispersion can be described by a Gaussian distribution function with σ_y as the standard deviation of the crosswind distance (e.g., Pasquill and Smith, 1983). In contrast to vertical dispersion, Gaussian characteristics are valid for crosswind dispersion for the entire stability range and are even appropriate over complex surfaces (e.g., Rotach et al., 2004). The three-dimensional particle dispersion of LPDM-B incorporates the Gaussian lateral dispersion (cf. Kljun et al., 2002). Note that variations of the mean wind direction by the Ekman effect are neglected. Hence, assuming Gaussian characteristics for the crosswind dispersion function, D_y , in Eq. (3), the flux footprint, $f(x, y)$, can be described as (e.g., Horst and Weil, 1992)

$$f(x, y) = \overline{f^y}(x) \frac{1}{\sqrt{2\pi}\sigma_y} \exp\left(-\frac{y^2}{2\sigma_y^2}\right). \quad (10)$$

Here, y is the crosswind distance from the centreline (i.e., the x -axis) of the footprint. The standard deviation of the crosswind distance, σ_y , depends on boundary layer conditions and the upwind distance from the receptor.

Similar to the crosswind-integrated footprint, we aim to derive a scaling approach of the lateral footprint distribution. We choose y and σ_y as the relevant length scales, and combine them with two scaling velocities, the friction velocity, u_* , and the standard deviation of lateral velocity fluctuations, σ_v . In addition to the Π groups of Eq. (4), we

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



therefore set

$$\begin{aligned}\Pi_5 &= \frac{y}{z_m} \\ \Pi_6 &= \frac{\sigma_y}{z_m} \\ \Pi_7 &= \frac{\sigma_v}{u_*}.\end{aligned}\tag{11}$$

5 In analogy to, for example, Nieuwstadt (1980), we define a non-dimensional standard deviation of the crosswind distance, σ_y^* , proportional to $\Pi_6 \Pi_7^{-1}$. The non-dimensional crosswind distance from the receptor, Y^* , is linked to σ_y^* through Eq. (10) and accordingly has to be proportional to $\Pi_5 \Pi_7^{-1}$. With that

$$Y^* = \rho_{s1} \frac{y}{z_m} \frac{u_*}{\sigma_v}\tag{12}$$

$$10 \quad \sigma_y^* = \rho_{s1} \frac{\sigma_y}{z_m} \frac{u_*}{\sigma_v},\tag{13}$$

where ρ_{s1} is a proportionality factor depending on stability. Based on the LPDM-B results, we set $\rho_{s1} = \min(1, |z_m/L|^{-1} 10^{-5} + p)$, with $p = 0.8$ for $L \leq 0$ and $p = 0.55$ for $L > 0$, respectively. In Fig. 3 unscaled distance from the receptor, x , and scaled, non-dimensional distance X^* are plotted against the unscaled and scaled deviations of the crosswind distance, respectively (see Appendix C for information on the derivation of σ_y from LPDM-B simulations). The scaling procedure is clearly successful, as the scaled deviation of the crosswind distance, σ_y^* , of all LPDM-B simulations collapse into a narrow ensemble when plotted against X^* (Fig. 3, right-hand panel). For large X^* , the ensemble spread increases mainly due to increased scatter of LPDM-B simulations for distances far away from the receptor.

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



4 Flux Footprint Parameterisation FFP

The successful scaling of both along-wind and crosswind shapes of the footprint into narrow ensembles within a non-dimensional framework provides the basis for fitting a parameterisation curve to the ensemble of scaled LPDM-B results. Like for the scaling approach, the footprint parameterisation is set up in two separate steps, the crosswind-integrated footprint, and its crosswind dispersion.

4.1 Crosswind-integrated footprint parameterisation

The ensemble of scaled crosswind-integrated footprints $F^{y^*}(X^*)$ of LPDM-B is sufficiently coherent that it allows fitting a single representative function to it. We choose the product of a power function and an exponential function as a fitting function for the parameterised cross-wind integrated footprint $\hat{F}^{y^*}(\hat{X}^*)$:

$$\hat{F}^{y^*} = a(\hat{X}^* - d)^b \exp\left(\frac{-c}{\hat{X}^* - d}\right). \quad (14)$$

Derivation of the fitting parameters, a, b, c, d is dependent on the constraint that the integral of the footprint parameterisation (cf. Eq. 14) must equal unity to satisfy the integral condition $\int_{-\infty}^{\infty} F^{y^*}(X^*) dX^* = 1$ (cf. Schmid, 1994; Kljun et al., 2004b). Hence

$$\int_d^{\infty} \hat{F}^{y^*}(\hat{X}^*) d\hat{X}^* = 1$$
$$= \int_d^{\infty} a(\hat{X}^* - d)^b \exp\left(\frac{-c}{\hat{X}^* - d}\right) d\hat{X}^* \quad (15)$$

$$= ac^{b+1} \Gamma(-b-1), \quad (16)$$

where $\Gamma(b)$ is the gamma function, and here $\Gamma(-b-1) \equiv \int_0^{\infty} t^{-b-2} \exp(-t) dt$.

The footprint parameterisation (Eq. 14) is fitted to the scaled footprint ensemble using an unconstrained nonlinear optimization technique based on the Nelder-Mead simplex direct search algorithm (Lagarias et al., 1998). With that, we find

$$\begin{aligned}
 a &= 1.452 \\
 b &= -1.991 \\
 c &= 1.462 \\
 d &= 0.136.
 \end{aligned}
 \tag{17}$$

Figure 2 shows that the parameterisation of the crosswind-integrated footprint represents all scaled footprints very well. The goodness-of-fit of this single parameterisation to the ensemble of scaled footprints for all simulated measurement heights, stability conditions, and roughness lengths, is evident from model performance metrics (see, e.g., Hanna et al., 1993; Chang and Hanna, 2004), including the Pearson's correlation coefficient (R), the fractional bias (FB), the fraction of the parameterisation within a factor of two of the scaled footprints (FAC2), the geometric variance (VG), and the normalised mean square error (NMSE). Table 3 lists these performance metrics for the parameterisation of the full extent of the crosswind-integrated footprint curve, for the footprint peak location, and for the footprint peak value of the parameterisation against the corresponding scaled LPDM-B results. The fit can be improved even more if the parameters are optimised to represent footprints of convective or neutral and stable conditions only (see Appendix A).

4.2 Parameterisation of the crosswind footprint extent

A single function can be fitted also to the scaled crosswind dispersion. In conformity with Deardorff and Willis (1975), the fitting function was chosen to be of the form

$$\hat{\sigma}_y^* = a_c \left(\frac{b_c (\hat{X}^*)^2}{1 + c_c \hat{X}^*} \right)^{1/2}.
 \tag{18}$$

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



A fit to the data of scaled LPDM-B simulations results in

$$\begin{aligned} a_c &= 2.17 \\ b_c &= 1.66 \\ c_c &= 20.0. \end{aligned} \tag{19}$$

5 The above parameterisation of the scaled deviation of the crosswind distance of the footprint is plotted in Fig. 3 (right panel). The performance metrics confirm that the σ_y^* of the scaled LPDM-B simulations are very well reproduced by the parameterisation $\hat{\sigma}_y^*$ (Table 3).

5 Real-scale flux footprint

10 Typically, users of footprint models are interested in footprints given in a real-scale framework, such that distances (e.g., between the receptor and maximum contribution to the measured flux) are given in metres or kilometers. Depending on the availability of observed parameters, the conversion from the non-dimensional (parameterised) footprints to real-scale dimensions can be based on either Eqs. (6) and (8), or on Eqs. (7) and (9). For convenience, the necessary steps of the conversion are described in the following, by means of some examples.

5.1 Maximum footprint contribution

The distance between the receptor and the maximum contribution to the measured flux can be approximated by the peak location of the crosswind-integrated footprint.

20 The maximum's position can be deduced from the derivative of Eq. (14) with respect to X^* :

$$\hat{X}_{\max}^* = \frac{-c}{b} + d. \tag{20}$$

Using the fitting parameters as listed in Eq. (17) to evaluate \hat{X}_{\max}^* , the peak location is converted from the scaled to the real-scale framework applying Eq. (6)

$$\begin{aligned} x_{\max} &= \hat{X}_{\max}^* z_m \left(1 - \frac{z_m}{h}\right)^{-1} \frac{\bar{u}(z_m)}{u_*} k \\ &= 0.87 z_m \left(1 - \frac{z_m}{h}\right)^{-1} \frac{\bar{u}(z_m)}{u_*} k, \end{aligned} \quad (21)$$

5 or, alternatively applying Eq. (7)

$$\begin{aligned} x_{\max} &= \hat{X}_{\max}^* z_m \left(1 - \frac{z_m}{h}\right)^{-1} \left(\ln\left(\frac{z_m}{z_0}\right) - \Psi_M\right) \\ &= 0.87 z_m \left(1 - \frac{z_m}{h}\right)^{-1} \left(\ln\left(\frac{z_m}{z_0}\right) - \Psi_M\right), \end{aligned} \quad (22)$$

10 with Ψ_M as given in Eq. (5). Hence x_{\max} can easily be derived from observations of z_m , h , and $\bar{u}(z_m)$, u_* , or z_0 , L , and the constant value of \hat{X}_{\max}^* . For suggestions on how to estimate the planetary boundary layer height, h , if not measured, see Appendix B.

5.2 Two-dimensional flux footprint

15 The two-dimensional footprint function can be calculated by applying the crosswind dispersion (Eq. 10) to the crosswind-integrated footprint. With inputs of the scaling parameters z_m , h , u_* , σ_v , and $\bar{u}(z_m)$ or z_0 , L , the two-dimensional footprint for any (x, y) combination can be derived easily by the following steps:

1. Evaluate X^* using Eq. (6) or (7) for given x .
2. Derive \hat{F}^{y*} and $\hat{\sigma}_y^*$ by inserting X^* for \hat{X}^* in Eqs. (14) and (18).
3. Invert Eqs. (8) or (9) and (13) to derive $\overline{f^y}$ and σ_y , respectively.

4. Evaluate $f(x, y)$ for given x and y using Eq. (10).

Fig. 4 depicts an example footprint for convective conditions, computed by applying the described approach to arrays of (x, y) combinations.

5.3 Relative contribution to the total footprint area

Often, the interest lies in the extent and location of the area contributing to, for example, 80% of the measured flux. For such applications, there are two approaches: (i) the crosswind-integrated footprint function, $\overline{f^Y}(x)$, is integrated from the receptor location to the upwind distance where the contribution of interest is obtained; (ii) the two-dimensional footprint function $f(x, y)$ is integrated from the footprint peak location into all directions along constant levels of footprint values until the contribution of interest is obtained. The result is the source area: the smallest possible area containing a given relative flux contribution (cf. Schmid, 1994). This approach can also be used as a one-dimensional equivalent to the source area, for the crosswind-integrated footprint.

For case (i) starting at the receptor location, we denote \hat{X}_R^* as the upper limit of the footprint parameterisation $\hat{F}^*(\hat{X}^*)$ containing the area of interest, i.e. the fraction R of the total footprint (that integrates to 1). The integral of Eq. (14) up to \hat{X}_R^* can be simplified (see Appendix D for details) as

$$R = \exp\left(\frac{-c}{\hat{X}_R^* - d}\right). \quad (23)$$

With that, the distance between the receptor and \hat{X}_R^* can be determined very simply as

$$\hat{X}_R^* = \frac{-c}{\ln(R)} + d, \quad (24)$$

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



and in real-scale

$$\begin{aligned}
 x_R &= \left(\frac{-c}{\ln(R)} + d \right) z_m \left(1 - \frac{z_m}{h} \right)^{-1} \frac{\bar{u}(z_m)}{u_*} k \\
 &= \left(\frac{-c}{\ln(R)} + d \right) z_m \left(1 - \frac{z_m}{h} \right)^{-1} \left(\ln \left(\frac{z_m}{z_0} \right) - \Psi_M \right), \quad (25)
 \end{aligned}$$

where R is a value between 0.1 and 0.99. As the above is based on the crosswind-integrated footprint, the derivation includes the full width of the footprint at any along-wind distance from the receptor.

There is no near-analytical solution for the description of the source area, the extent of the fraction R , when integrating from the peak location (e.g., Schmid, 1994; Kormann and Meixner, 2001). Instead, the size of the source area has to be derived through iterative search. For crosswind-integrated footprints, the downwind ($\hat{X}_{Rd}^* < \hat{X}_{max}^*$) and upwind ($\hat{X}_{max}^* < \hat{X}_{Ru}^*$) distance from the receptor including the fraction R can be approximated as a function of \hat{X}_R^* using LPDM-B results:

$$\hat{X}_{Rd,u}^* = n_1 \left(\hat{X}_R^* \right)^{n_2} + n_3 \quad (26)$$

For the downwind limit \hat{X}_{Rd}^* , $n_1 = 0.44$, $n_2 = -0.77$, $n_3 = 0.24$. For the upwind limit, \hat{X}_{Ru}^* , the approximation is split into two parts, $n_1 = 0.60$, $n_2 = 1.32$, $n_3 = 0.61$ for $\hat{X}_{max}^* < \hat{X}_R^* \leq 1.5$, and $n_1 = 0.96$, $n_2 = 1.01$, $n_3 = 0.19$ for $1.5 < \hat{X}_R^* < \infty$. The scaled distances $\hat{X}_{*,Rd}^*$ and $\hat{X}_{*,Ru}^*$ can again be transformed into real-scale values using Eqs. (6) or (7).

If the size and position of the two-dimensional R -source area are of interest, but not the footprint function value (i.e. footprint weight) itself, the pairs of x_R and y_R describing its shape can be drawn from a lookup table of the scaled corresponding X_R^* and Y_R^* values. If the footprint function values are needed for weighting of source emissions or sinks, iterative search procedures have to be applied to each footprint. Figure 4 (left panel) illustrates examples of contour lines of R -fractions from 10 to 90 % of a footprint.

**Two-dimensional
parameterisation for
Flux Footprint
Predictions**

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



5.4 Footprint estimates for extended time series

The presented footprint model is computationally inexpensive and hence can be run easily for several years of data in, for example, half-hourly time steps. Each single data point can be associated with its source area by converting the footprint coordinate system to geographical coordinates, and positioning a discretised spatial array containing the footprint function onto a map or aerial image surrounding the receptor position. In many cases, an aggregated footprint, a so-called footprint climatology, is of more interest to the user than a series of footprint estimates. The aggregated footprint can be normalised and presented for several levels of relative contribution to the total aggregated footprint. Figure 5 shows an example of such a footprint climatology for one month of half-hourly input data for the ICOS flux tower site Norunda in Sweden (cf. Lindroth et al., 1998). A footprint climatology can be derived for selected hours of several days, for months, seasons, years, etc., depending on interest.

Combined with remotely sensed data, a footprint climatology provides spatially explicit information on vegetation structure, topography, and possible source/sink influences on the measured fluxes. This additional information has proven to be beneficial for analysis and interpretation of flux data (e.g., Rahman et al., 2001; Rebmann et al., 2005; Kim et al., 2006; Chasmer et al., 2008; Barcza et al., 2009; Gelybó et al., 2013). A combination of the footprint parameterisation presented here with high-resolution remote sensing data can be used not only to estimate the footprint area for measurements, but also to weigh or classify spatially continuous information on the surface and vegetation for its impact on measurements.

Certain remotely sensed data, for example airborne LiDAR data, allow for approximate derivation of the surface roughness length (Chasmer et al., 2008). Alternatively, z_0 may be estimated from flux tower measurements (e.g., Kim et al., 2006). If z_0 varies substantially for different wind directions, we suggest running a spin-up of the footprint model, updating the footprint-weighted z_0 input with each step, until a “steady state”

GMDD

8, 6757–6808, 2015

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



restrictive assumptions and turbulence regime limitations than what most other footprint models are faced with. We have applied the new scaling approach to LPDM-B, but it is likely applicable similarly to other complex footprint models.

For the calculation of footprints with FFP, the values of the input parameters z_m , $\bar{u}(z_m)$, u_* , L , and σ_y can be derived from measurements typically available from flux towers. Input values for z_0 may be derived from turbulence measurements or estimated using the mean height of the roughness elements (e.g., Grimmond and Oke, 1999). In the case of not perfectly homogeneous surfaces, these z_0 values may vary depending on wind direction (see also Sect. 5.4). Measurements of h are available only rarely, and the accuracy of estimates of h may vary substantially. In the following, we hence evaluate the sensitivity of the footprint parameterisation on the input parameters z_0 and h .

The sensitivity of the FFP derived footprint estimate to changes in h and z_0 by ± 5 , ± 10 , and $\pm 20\%$ is tested for all scenarios of Table 2. For all scenarios, even changes of 20% in h and z_0 result in only minor shifts or size alterations of the footprint (Table 5). As to be expected, a small variation in the input value of the boundary layer height, h , does hardly alter footprint estimates for stability regimes with large h , namely convective and neutral regimes. This finding is rather convenient, as reliable estimates of h are difficult to derive for convective stabilities (see Appendix B). For stable scenarios, the footprint peak location is shifted closer to the receptor for overestimated h and shifted further from the receptor for underestimated h . For these cases, overestimated h will also very slightly increase the width of the footprint as described by σ_y and vice versa. The impact of variations in the roughness length is quite similar for all atmospheric conditions, slightly decreasing the footprint extent for overestimated z_0 . Changes of the roughness length do not directly impact σ_y but the absolute value of the footprint $f(x, y)$ can still vary, as a result of imposed changes in $\bar{f}^y(x)$ (cf. Eq. 10).

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



6.2 Limitations of FFP

Since FFP is based on LPDM-B simulations, LPDM-B's application limits are also applicable to FFP. As for most footprint models, these include the requirements of stationarity and horizontal homogeneity of the flow over time periods that are typical for flux calculations (e.g., 30–60 min). If applied outside these restrictions, FFP will still provide footprint estimates, but their interpretation becomes difficult and unreliable. Similarly, LPDM-B does not include roughness sublayer dispersion near the ground, nor dispersion within the entrainment layer at the top of the Convective Boundary Layer. Hence, we suggest limiting FFP simulations to measurement heights above the roughness sublayer and below the entrainment layer (e.g., for airborne flux measurements). The Π functions of the scaling procedure also set some limitations to the presented footprint parameterisation (see below). Further, the presented footprint parameterisation has been evaluated for the range of parameters of Table 1 and application outside this range should be considered with care. For calculations of source areas of fractions R of the footprint, we suggest $R \leq 0.9$ (note that the source area for $R = 1$ is infinite). In most cases, $R = 0.8$ is sufficient to estimate the area of the main impact to the measurement.

The requirements and limits of FFP for the measurement height and stability mentioned above can be summarised as follows:

$$\begin{aligned} 20 z_0 < z_m < h_e \\ -15.5 \leq \frac{z_m}{L}, \end{aligned} \quad (27)$$

where $20 z_0$ is of the same order as the roughness sublayer height, z_* (see Sect. 2), and h_e is the height of the entrainment layer (typically, $h_e \approx 0.8h$, e.g., Holtslag and Nieuwstadt, 1986). Eq. (27) is required by Π_4 for a measurement height just above z_* and may be adjusted for different values of z_* . At the same time, Eq. (27) also restricts application of the footprint parameterisation for very large measurement heights in strongly convective situations. For such cases, scaled footprints of LPDM-B simulations are of slightly shorter extent than those of the parameterisation and also include

GMDD

8, 6757–6808, 2015

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Appendix A: Footprint parameterisation optimised for specific stability conditions

There may be situations where footprint estimates are needed for only one specific stability regime, for example, when footprints are calculated for only a short period of time, or for a certain daytime over several days. For such cases, it may be beneficial to use footprint parameterisation settings optimised for this stability regime only. While scaled footprint estimates for neutral and stable conditions collapse to a very narrow ensemble of curves, footprints for strongly convective situations may also include contributions from downwind of the receptor location. For neutral and stable conditions, a specific set of fitting parameters for FFP has been derived using the LPDM-B simulations of Scenarios 4 to 6 (Table 1). For convective conditions, additional LPDM-B simulations to Table 1 (Scenarios 1 to 3) have been included, to represent more strongly convective situations. These simulations (Scenario 1*) were run for the same set of receptor heights and surface roughness length as listed in Table 1, but with $u_* = 0.2 \text{ m s}^{-1}$, $w_* = 2.0 \text{ m s}^{-1}$, $L = -5 \text{ m}$, and $h = 2000 \text{ m}$. The resulting values for the parameters a , b , c , and d for the crosswind-integrated footprint parameterisation, and a_c , b_c , and c_c for the crosswind dispersion parameterisation are listed in Table 6.

Please note that when applying these fitting parameters, the footprint functions for convective and neutral/stable conditions will not be continuous. We hence suggest to use the universal fitting parameters of Eqs. (17) and (19) for cases where a transition between stability regimes may occur.

Appendix B: Derivation of the boundary layer height

Determination of the boundary layer height, h , is a delicate matter, and no single “universal approach” can be proposed. Clearly, any available nearby observation (e.g., from LiDAR or radio sounding) should be used. h may also be diagnosed from assimilation runs of high-resolution numerical weather predictions. For unstable (daytime) condi-

GMDD

8, 6757–6808, 2015

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



tions, Seibert et al. (2000) give a comprehensive overview on different methods and discuss the associated caveats and uncertainties. For stable conditions, Zilitinkevich et al. (2012) and Zilitinkevich and Mironov (1996) provide a theoretical assessment of the boundary layer height under various limiting conditions. If none of the above measurements or approaches for h are applicable, a so-called “meteorological pre-processor” may be used. A non-exhaustive suggestion for the latter is provided in the following.

For stable and neutral conditions there are simple diagnostic relations with which the boundary layer height can be estimated. Nieuwstadt (1981) proposed an interpolation formula for neutral to stable conditions:

$$h = \frac{L}{3.8} \left[-1 + \left(1 + 2.28 \frac{u_*}{fL} \right)^{1/2} \right], \quad (\text{B1})$$

where L is the Obukhov length ($L = -u_*^3 \bar{\Theta} / (kg \overline{(w'\Theta')_0})$), $\bar{\Theta}$ is the mean potential temperature, $k = 0.4$ the von Karman constant, g the acceleration due to gravity, $\overline{(w'\Theta')_0}$ the surface (kinematic) turbulent flux of sensible heat, and $f = 2\Omega \sin\phi$ is the Coriolis parameter (ϕ being latitude and Ω the angular velocity of the Earth’s rotation). Eq. (B1) is widely used in pollutant dispersion modelling (e.g., Hanna and Chang, 1993) and has the desired property to have limiting values corresponding to theoretical expressions. For large L (i.e., approaching near-neutral conditions), Eq. (B1) tends towards

$$h_n = c_n \frac{u_*}{|f|}. \quad (\text{B2})$$

In their meteorological pre-processor, Hanna and Chang (1993) recommend $c_n = 0.3$ corresponding to Tennekes (1973). Strictly speaking, Eq. (B2) is valid only as long as the stability of the free atmosphere is also close to neutral, i.e. $10 < N|f|^{-1} < 70$, where N is the Brunt-Väisälä frequency above the boundary layer defined as $N = (g/\bar{\Theta} d\bar{\Theta}/dz)^{1/2}$ (Zilitinkevich et al., 2012). If this is not the case, but L is still very

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



large, the asymptotic limit becomes (Zilitinkevich et al., 2012)

$$h = c_{nn} \frac{u_*}{|fN|^{1/2}}. \quad (\text{B3})$$

For strongly stable conditions, Eq. (B1) approaches

$$h_s = c_s \left(\frac{u_* L}{|f|} \right)^{1/2}, \quad (\text{B4})$$

as already proposed by Zilitinkevich (1972) who later termed this equation an “intermediate asymptote” for the more complete asymptotic expression derived for the stable boundary layer height by Zilitinkevich and Mironov (1996). They assign Eq. (B4) to an applicability range of $4 \ll u_* L / |f| \ll 100$. The numerical parameters in Eq. (B1) suggest $c_s \approx 0.4$ for the limit of very strong stability. Zilitinkevich and Mironov (1996) suggested $c_s \approx 0.63$ and Zilitinkevich et al. (2007) later proposed $c_s \approx 0.3$ based on LES results (here, both values are adapted for the above definition of L).

For convective conditions, the boundary layer height cannot be diagnosed due to the nearly symmetric diurnal cycle of the surface heat flux. It must therefore be integrated employing a prognostic expression, and starting at sunrise (before the surface heat flux first becomes positive) when the initial height is diagnosed using one of the above expressions. The slab-model of Batchvarova and Gryning (1991) is based on a simplified TKE (turbulence kinetic energy) equation including thermal and mechanical energy. The resulting rate of change for the boundary layer height is implicit in h and may be solved iteratively or using $h(t_i)$ to determine the rate of change to yield $h(t_{i+1})$:

$$\frac{dh}{dt} = \frac{(\overline{w'\Theta'})_0}{\gamma} \left[\left(\frac{h^2}{(1+2A)h - 2BkL} \right) + \frac{Cu_*^2 T}{\gamma g [(1+A)h - BkL]} \right]^{-1}. \quad (\text{B5})$$

Here, γ is the gradient of potential temperature above the Convective Boundary Layer (CBL). The latter is often not available for typical applications and can be approximated

**Two-dimensional
parameterisation for
Flux Footprint
Predictions**

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



accordance with Taylor's classical results for the near-source limit (Taylor, 1921). Hence σ_y of Eq. (10) becomes $\sigma_y = \sigma_{y,0} + \sigma_{y,res}$ where the latter is the crosswind dispersion explicitly resolved by LPDM-B. Based on LPDM-B results, we set $\rho_{s2} = 0.35, 0.3, 0.5$ for convective ($L < 0$), neutral ($L \rightarrow \infty$), and stable conditions ($L > 0$), respectively.

5 Appendix D: Derivation of relative contribution to total footprint area

For the integration of the footprint parameterisation $\hat{F}^*(\hat{X}^*)$ to an upper limit at $\hat{X}_{*,R}$, we introduce the auxiliary variables $x_d = \hat{X}_* - d$ and $r = \hat{X}_{*,R} - d$. With that, and based on Eq. (15), the integral of the footprint parameterisation up to r can be expressed as

$$R = \int_d^{\hat{X}_{*,R}} \hat{F}^*(\hat{X}^*) d\hat{X}^* = \int_0^r a (x_d)^b \exp\left(\frac{-c}{x_d}\right) dx_d. \quad (D1)$$

10 Substituting c/x_d with t , the above integral can be solved as follows

$$\begin{aligned} R &= \int_{\infty}^{c/r} a \left(\frac{c}{t}\right)^b \exp(-t) \frac{-c}{t^2} dt \\ &= a c^{b+1} \int_{c/r}^{\infty} t^{-b-2} \exp(-t) dt \end{aligned} \quad (D2)$$

$$\begin{aligned} &= a c^{b+1} \Gamma(-b-1, c/r) \\ &= a c^{b+1} \Gamma(-b-1, \frac{c}{\hat{X}_{*,R} - d}). \end{aligned} \quad (D3)$$

15 Here, $\Gamma(-b-1, c/(\hat{X}_{*,R} - d))$ is the upper incomplete gamma function defined as $\Gamma(s, l) \equiv \int_l^{\infty} t^{s-1} \exp(-t) dt$. As $b = -1.991 \approx -2$, $a \approx c$ (Eq. 17), and $c^{b+1} \approx c^{-1}$,

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Eq. (D2) can be further simplified to

$$R \approx \int_{c/r}^{\infty} \exp(-t) dt$$
$$= \exp\left(\frac{-c}{r}\right) = \exp\left(\frac{-c}{\hat{\chi}_{*,R} - d}\right). \quad (\text{D4})$$

Code availability

5 The code of the presented two-dimensional flux footprint parameterisation FFP and the crosswind-integrated footprint can be from www.footprint.kljun.net. It is available in several different platform-independent programming languages, including an app for mobile devices. Updated versions will be freely available at www.footprint.kljun.net. On the same webpage, an online version of the footprint parameterisation is available.

10 *Acknowledgements.* The authors would like to thank Anders Lindroth, Michal Heliasz, and Meelis Mölder for the Norunda flux tower data. This research was supported by the UK Natural Environment Research Council (NERC, NE/G000360/1), the Commonwealth Scientific and Industrial Research Organisation Australia (CSIRO, OCE2012), by the LUCCI Linnaeus center of Lund University, funded by the Swedish Research Council, Vetenskapsrådet, the Austrian Research Community (OeFG), the Royal Society UK (IE110132), and by the German Helmholtz
15 programme ATMO and the Helmholtz climate initiative for regional climate change research, REKLIM.

References

20 Aubinet, M., Chermanne, B., Vandenhaute, M., Longdoz, B., Yernaux, M., and Laitat, E.: Long Term Carbon Dioxide Exchange Above a Mixed Forest in the Belgian Ardennes, *Agric. For. Meteorol.*, 108, 293–315, 2001. 6759

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Kim, J., Guo, Q., Baldocchi, D. D., Leclerc, M. Y., Xu, L., and Schmid, H. P.: Upscaling Fluxes from Tower to Landscape: Overlaying Flux Footprints on High-resolution (IKONOS) Images of Vegetation Cover, *Agric. For. Meteorol.*, 136, 132–146, 2006. 6761, 6775
- 5 Kljun, N., Rotach, M. W., and Schmid, H. P.: A 3D Backward Lagrangian Footprint Model for a Wide Range of Boundary Layer Stratifications, *Bound.-Lay. Meteorol.*, 103, 205–226, 2002. 6758, 6760, 6761, 6762, 6763, 6767, 6776
- Kljun, N., Kormann, R., Rotach, M. W., and Meixner, F. X.: Comparison of the Lagrangian Footprint Model LPDM-B with an Analytical Footprint Model, *Bound.-Lay. Meteorol.*, 106, 349–355, 2003. 6780
- 10 Kljun, N., Kastner-Klein, P., Fedorovich, E., and Rotach, M. W.: Evaluation of Lagrangian Footprint Model Using Data from a Wind Tunnel Convective Boundary Layer, *Agric. For. Meteorol.*, 127, 189–201, 2004a. 6763, 6776
- Kljun, N., Rotach, M. W., and Calanca, P.: A Simple Parameterisation for Flux Footprint Predictions, *Bound.-Lay. Meteorol.*, 112, 503–523, 2004b. 6758, 6760, 6761, 6763, 6764, 6765, 15 6766, 6769, 6779, 6808
- Kormann, R. and Meixner, F. X.: An Analytical Footprint Model for Non-Neutral Stratification, *Bound.-Lay. Meteorol.*, 99, 207–224, 2001. 6760, 6761, 6774, 6779, 6807
- Kustas, W. P., Anderson, M. C., French, A. N., and Vickers, D.: Using a Remote Sensing Field Experiment to Investigate Flux-footprint Relations and Flux Sampling Distributions for Tower and Aircraft-based Observations, *Adv. Water Resour.*, 29, 355–368, 2006. 6759
- 20 Lagarias, J. C., Reeds, J. A., Wright, M. H., and Wright, P. E.: Convergence Properties of the Nelder-Mead Simplex Method in Low Dimensions, *SIAM J. Optimiz.*, 9, 112–147, 1998. 6770
- Leclerc, M. Y. and Foken, T.: *Footprints in Micrometeorology and Ecology*, Springer, Heidelberg, Germany, New York, USA, Dordrecht, the Netherlands, London, UK, 1 edn., 2014. 6761
- 25 Leclerc, M. Y. and Thurtell, G. W.: Footprint Prediction of Scalar Fluxes Using a Markovian Analysis, *Bound.-Lay. Meteorol.*, 52, 247–258, 1990. 6760
- Leclerc, M. Y., Shen, S., and Lamb, B.: Observations and Large-Eddy Simulation Modeling of Footprints in the Lower Convective Boundary Layer, *J. Geophys. Res.*, 102, 9323–9334, 1997. 6759
- 30 Li, F., Kustas, W. P., Anderson, M. C., Prueger, J. H., and Scott, R. L.: Effect of Remote Sensing Spatial Resolution on Interpreting Tower-based Flux Observations, *Remote Sens. Environ.*, 112, 337–349, 2008. 6761

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Lindroth, A., Grelle, A., and Morén, A.-S.: Long-term Measurements of Boreal Forest Carbon Balance Reveal Large Temperature Sensitivity, *Glob. Change Biol.*, 4, 443–450, 1998. 6775
- Luhar, A. K. and Rao, K. S.: Source Footprint Analysis for Scalar Fluxes Measured in Flows over an Inhomogeneous Surface, *NATO Chal. M.*, 18, 315–322, 1994. 6759
- 5 Mauder, M., Desjardins, R. L., and MacPherson, I.: Creating Surface Flux Maps from Airborne Measurements: Application to the Mackenzie Area GEWEX Study MAGS 1999, *Bound.-Lay. Meteorol.*, 129, 431–450, 2008. 6759
- Mauder, M., Cuntz, M., Drüe, C., Graf, A., Rebmann, C., Schmid, H. P., Schmidt, M., and Steinbrecher, R.: A strategy for Quality and Uncertainty assessment of Long-term Eddy-covariance Measurements, *Agric. For. Meteorol.*, 169, 122–135, 2013. 6759
- 10 Metzger, S., Junkermann, W., Mauder, M., Beyrich, F., Butterbach-Bahl, K., Schmid, H. P., and Foken, T.: Eddy-covariance flux measurements with a weight-shift microlight aircraft, *Atmos. Meas. Tech.*, 5, 1699–1717, doi:10.5194/amt-5-1699-2012, 2012. 6759
- Nagy, M. T., Janssens, I. A., Yuste, J. C., Carrara, A., and R., C.: Footprint-adjusted Net Ecosystem CO₂ Exchange and Carbon Balance Components of a Temperate Forest, *Agric. For. Meteorol.*, 139, 344–360, 2006. 6759
- 15 Nieuwstadt, F. T. M.: Application of Mixed-Layer Similarity to the Observed Dispersion from a Ground-Level Source, *J. Appl. Meteorol.*, 19, 157–162, 1980. 6768
- Nieuwstadt, F. T. M.: The Steady-state Height and Resistance Laws of the Nocturnal Boundary Layer: Theory Compared with Cabauw Observations, *Bound.-Lay. Meteorol.*, 20, 3–17, 1981. 6783
- 20 Pasquill, F. and Smith, F. B.: Atmospheric Diffusion, Ellis Horwood Limited, J. Wiley and Sons, New York, USA, 3rd edn., 1983. 6762, 6767
- Rahman, A. F., Gamon, J. A., Fuentes, D. A., Roberts, D. A., and Prentiss, D.: Modeling Spatially Distributed Ecosystem Flux of Boreal Forest Using Hyperspectral Indices from AVIRIS Imagery, *J. Geophys. Res.-Atmos.*, 106, 33579–33591, 2001. 6775
- 25 Rannik, Ü., Aubinet, M., Kurbanmuradov, O., Sabelfeld, K. K., Markkanen, T., and Vesala, T.: Footprint Analysis for Measurements over a Heterogeneous Forest, *Bound.-Lay. Meteorol.*, 97, 137–166, 2000. 6760
- 30 Raupach, M. R., Antonia, R. A., and Rajagopalan, S.: Rough-Wall Turbulent Boundary Layers, *Appl. Mech. Rev.*, 44, 1–25, 1991. 6763
- Rebmann, C., Göckede, M., Foken, T., Aubinet, M., Aurela, M., Berbigier, P., Bernhofer, C., Buchmann, N., Carrara, A., Cescatti, A., Ceulemans, R., Clement, R., Elbers, J. A., Granier,

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

A., Grünwald, T., Guyon, D., Havránková, K., Heinesch, B., Knohl, A., Laurila, T., Longdoz, B., Marcolla, B., Markkanen, T., Miglietta, F., Moncrieff, K., Montagnani, L., Moors, E., Nardino, M., Ourcival, J.-M., Rambal, S., Rannik, Ü., Rotenberg, E., Sedlak, P., Unterhuber, G., Vesala, T., and Yakir, D.: Quality Analysis Applied on Eddy Covariance Measurements at Complex Forest Sites Using Footprint Modelling, *Theor. Appl. Climatol.*, 80, 121–141, 2005. 6759, 6775

Rotach, M. W. and Calanca, P.: Microclimate, in: *Encyclopedia of Atmospheric Sciences*, edited by North, G. R., vol. 1, 258–264, Academic Press, Elsevier Science Publishing Co. Inc., London, UK, 2nd edn., 2014. 6763

Rotach, M. W., Gryning, S.-E., and Tassone, C.: A Two-Dimensional Lagrangian Stochastic Dispersion Model for Daytime Conditions, *Quart. J. Roy. Meteorol. Soc.*, 122, 367–389, 1996. 6763, 6776

Rotach, M. W., Gryning, S.-E., Batchvarova, E., Christen, A., and Vogt, R.: Pollutant Dispersion Close to an Urban Surface: the BUBBLE Tracer Experiment, *Meteorol. Atmos. Phys.*, 87, 39–56, 2004. 6767

Schmid, H. P.: Source Areas for Scalars and Scalar Fluxes, *Bound.-Lay. Meteorol.*, 67, 293–318, 1994. 6760, 6761, 6769, 6773, 6774

Schmid, H. P.: Experimental Design for Flux Measurements: Matching Scales of Observations and Fluxes, *Agric. For. Meteorol.*, 87, 179–200, 1997. 6760

Schmid, H. P.: Footprint Modeling for Vegetation Atmosphere Exchange Studies: A Review and Perspective, *Agric. For. Meteorol.*, 113, 159–184, 2002. 6759, 6761, 6762

Schmid, H. P. and Lloyd, C. R.: Spatial Representativeness and the Location Bias of Flux Footprints over Inhomogeneous Areas, *Agric. For. Meteorol.*, 93, 195–209, 1999. 6761

Schmid, H. P. and Oke, T. R.: A Model to Estimate the Source Area Contributing to Turbulent Exchange in the Surface Layer over Patchy Terrain, *Quart. J. Roy. Meteorol. Soc.*, 116, 965–988, 1990. 6760

Schuepp, P. H., Leclerc, M. Y., Macpherson, J. I., and Desjardins, R. L.: Footprint Prediction of Scalar Fluxes from Analytical Solutions of the Diffusion Equation, *Bound.-Lay. Meteorol.*, 50, 355–373, 1990. 6760

Seibert, P., Beyrich, F., Gryning, S.-E., Joffre, S., Rasmussen, A., and Tercier, P.: Review and Intercomparison of Operational Methods for the Determination of the Mixing Height, *Atmos. Environ.*, 34, 1001–1027, 2000. 6783

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Wilson, J. D. and Swaters, G. E.: The Source Area Influencing a Measurement in the Planetary Boundary Layer: The “Footprint” and the “Distribution of Contact Distance”, *Bound.-Lay. Meteorol.*, 55, 25–46, 1991. 6760

Zilitinkevich, S., Esau, I., and Baklanov, A.: Further Comments on the Equilibrium Height of Neutral and Stable Planetary Boundary Layers, *Q. J. R. Meteorol. Soc.*, 133, 265–271, 2007. 6784

Zilitinkevich, S., Tyuryakov, S. A., Troitskaya, Y. I., and Mareev, E. A.: Theoretical Models of the Height of the Atmospheric Boundary Layer and Turbulent Entrainment at Its Upper Boundary, *Izv. Atmos. Ocean. Phys.*, 48, 133–142, 2012. 6783, 6784

Zilitinkevich, S. S.: On the Determination of the Height of the Ekman Boundary Layer, *Bound.-Lay. Meteorol.*, 3, 141–145, 1972. 6784

Zilitinkevich, S. S. and Mironov, D. V.: A Multilimit Formulation for the Equilibrium Depth of a Stably Stratified Boundary Layer, *Bound.-Lay. Meteorol.*, 81, 325–351, 1996. 6783, 6784

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 1. Velocity scales (friction velocity, u_* , and convective velocity scale, w_*), Obukhov length (L), and planetary boundary layer height (h) characterising the stability regimes of LPDM-B simulations at measurement height z_m and with roughness length z_0 . Cases with measurement height within the roughness sublayer were disregarded (see text for details).

Scenario	u_* [m s^{-1}]	w_* [m s^{-1}]	L [m]	h [m]
1 convective	0.2	1.4	–15	2000
2 convective	0.2	1.0	–30	1500
3 convective	0.3	0.5	–650	1200
4 neutral	0.5	0.0	∞	1000
5 stable	0.4	–	1000	800
6 stable	0.4	–	560	500
7 stable	0.3	–	130	250
8 stable	0.3	–	84	200

Receptor heights at $z_m/h = [0.005, 0.01, 0.075, 0.25, 0.50]$
 Roughness lengths $z_0 = [0.01, 0.1, 0.3, 1.0, 3.0]$ m

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Table 2. Velocity scales (u_* , w_*), Obukhov length (L), planetary boundary layer height (h) describing the stability regimes of LPDM-B simulations for evaluation of the footprint parameterisation at measurement heights z_m and with roughness lengths z_0 .

Scenario	u_* [m s^{-1}]	w_* [m s^{-1}]	L [m]	h [m]
10 convective	0.20	1.00	-50	2500
11 convective	0.20	0.80	-100	2500
12 convective	0.25	0.75	-200	2160
15 neutral	0.40	0.00	∞	800
13 neutral	0.60	0.00	∞	1200
14 neutral	0.80	0.00	∞	1600
16 stable	0.30	-	200	310
17 stable	0.50	-	100	280
18 stable	0.35	-	50	170

[z_m, z_0] = [20 m, 0.05 m], [30 m, 0.5 m], [50 m, 0.05 m]

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Table 3. Performance of the footprint parameterisation evaluated against all (200) scaled footprints of LPDM-B simulations as in Table 1. Performance of the crosswind-integrated footprint parameterisation was tested against the complete footprint curve (F^{y*}), the footprint peak location (X_{\max}^*), and the footprint peak value (F_{\max}^{y*}). The parameterisation for crosswind dispersion ($\hat{\sigma}_y^*$) was similarly tested against $\sigma_y^*(x)$ for all scaled footprints. In all cases the following performance measures were used: Pearson’s correlation coefficient (R), fractional bias (FB), fraction of the parameterisation within a factor of two of the scaled footprints (FAC2), geometric variance (VG), and normalised mean square error (NMSE). Note that R is not evaluated for X_{\max}^* and F_{\max}^{y*} as the footprint parameterisation provides a single value for each of these.

Performance metrics	F^{y*}	X_{\max}^*	F_{\max}^{y*}	σ_y^*
R	0.96	–	–	0.90
FB	0.022	0.050	0.008	–0.006
FAC2	0.71	1.00	1.00	1.00
VG	2.86	1.04	1.05	1.02
NMSE	0.48	0.05	0.05	0.02

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 4. Performance of the footprint parameterisation evaluated against the second set of LPDM-B footprints of Table 2 (9 simulations for each stability regime), in real scale. Performance of the crosswind-integrated footprint parameterisation was tested against the crosswind-integrated footprint curve ($\overline{f^y}$), the footprint peak location (x_{\max}), the footprint peak value ($\overline{f^y}_{\max}$), and the standard deviation of the crosswind distance at the peak location ($\sigma_y(x_{\max})$). See Table 3 for abbreviations of performance measures.

Performance metrics	$\overline{f^y}$ [m^{-1}]	x_{\max} [m]	$\overline{f^y}_{\max}$ [m^{-1}]	$\sigma_y(x_{\max})$ [m]
Convective scenarios 10, 11, 12				
R	0.97	0.99	0.97	0.99
FB	0.014	0.109	-0.063	0.125
FAC2	0.99	1.00	1.00	1.00
VG	43.36	1.06	1.02	1.07
NMSE	0.33	0.09	0.03	0.07
Neutral scenarios 13, 14, 15				
R	0.97	0.99	0.96	0.37
FB	0.020	0.174	-0.067	0.008
FAC2	0.99	1.00	1.00	1.00
VG	1.62	1.11	1.04	1.13
NMSE	0.27	0.22	0.03	0.13
Stable scenarios 16, 17, 18				
R	0.99	0.99	0.99	0.88
FB	0.020	0.092	0.000	-0.013
FAC2	0.89	1.00	1.00	1.00
VG	1.16	1.03	1.03	1.02
NMSE	0.09	0.13	0.01	0.03

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Table 5. Sensitivity of footprint peak location (x_{\max}), peak value ($\overline{f^y_{\max}}$) and the standard deviation of the crosswind distance at the peak location ($\sigma_y(x_{\max})$) of the footprint parameterisation FFP to changes of the input parameters h (boundary layer height) and z_0 (roughness length) by ± 5 , ± 10 , ± 20 % for all scenarios of Table 2, in real scale. Changes are denoted in % deviation from the footprint parameterisation for the original input values of Table 2.

Change in input [%]	Δx_{\max} [%]	$\Delta \overline{f^y_{\max}}$ [%]	$\Delta \sigma_y(x_{\max})$ [%]
Convective scenarios 10, 11, 12			
h	± 5	∓ 0.1	± 0.1
h	± 10	∓ 0.1	± 0.1
h	± 20	∓ 0.3	± 0.3
z_0	± 5	∓ 1.1	± 1.1
z_0	± 10	∓ 2.2	± 2.2
z_0	± 20	∓ 4.4	± 4.3
Neutral scenarios 13, 14, 15			
h	± 5	∓ 0.2	± 0.2
h	± 10	∓ 0.3	± 0.3
h	± 20	∓ 0.7	± 0.7
z_0	± 5	∓ 0.9	± 0.9
z_0	± 10	∓ 1.9	± 1.9
z_0	± 20	∓ 3.8	± 3.7
Stable scenarios 16, 17, 18			
h	± 5	∓ 0.9	± 0.9
h	± 10	∓ 1.8	± 1.7
h	± 20	∓ 3.7	± 3.6
z_0	± 5	∓ 0.7	± 0.7
z_0	± 10	∓ 1.4	± 1.4
z_0	± 20	∓ 2.8	± 2.8

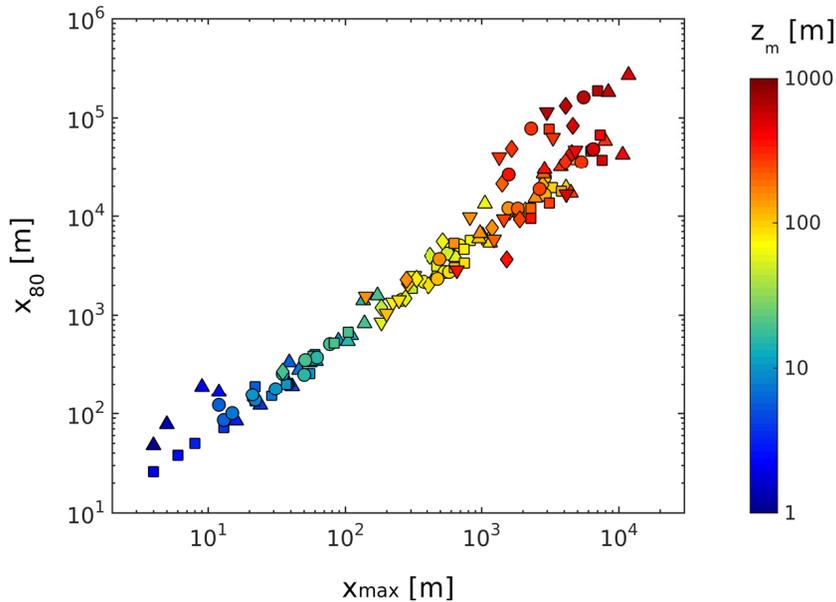


Figure 1. Range of peak locations (x_{\max}) and extent of 80% crosswind-integrated footprints (x_{80}) of LPDM-B simulations as in Table 1. The color depicts the simulated measurement heights, symbols stand for modelled roughness lengths, $z_0 = 0.01$ m (Δ), 0.1 m (\square), 0.3 m (\circ), 1.0 m (\diamond), 3.0 m (∇). Note the use of the log scale to accommodate the full range of the simulations.

Two-dimensional
parameterisation for
Flux Footprint
Predictions

N. Kljun et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

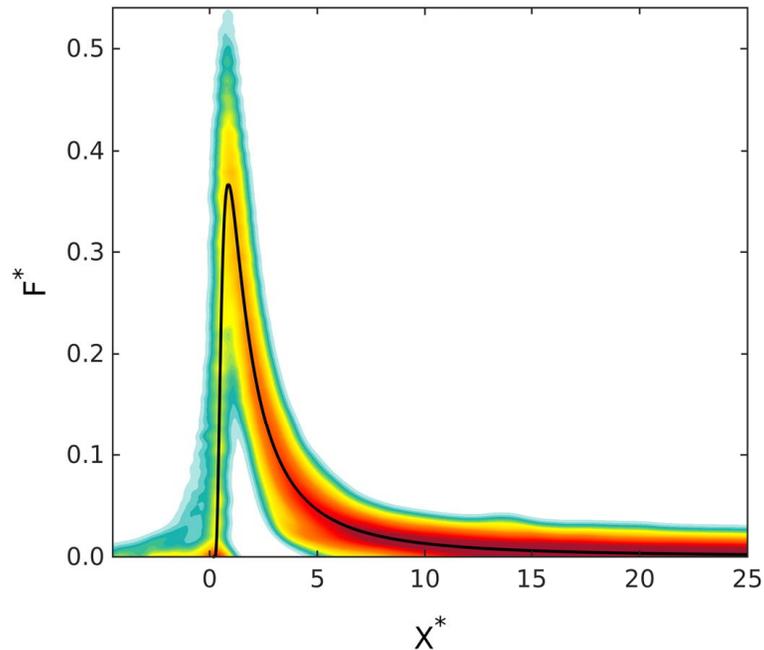


Figure 2. Density plot of scaled crosswind-integrated footprints of LPDM-B simulations as in Table 1 (low density: light blue; high density, 100 times denser than low density: dark red). The footprint parameterisation $\hat{F}^{y^*}(\hat{X}^*)$ (cf. Eq. 14) is plotted as black line.

Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

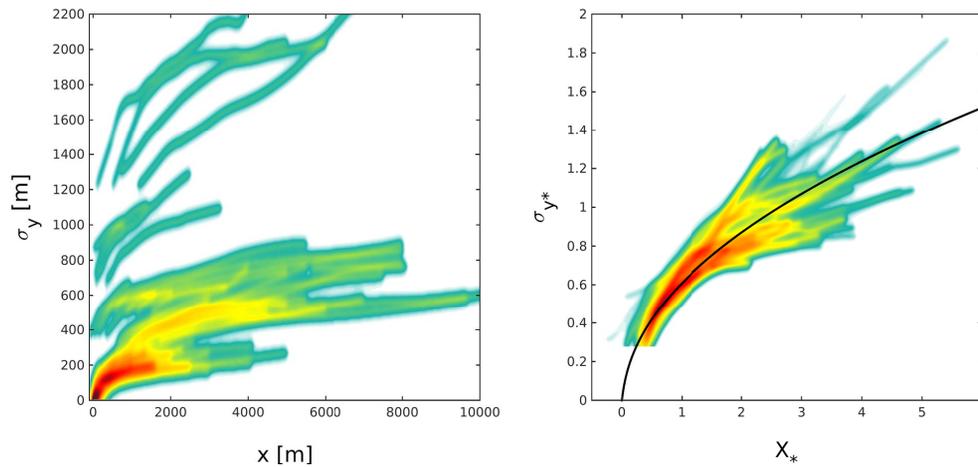


Figure 3. Density plot of real-scale (left panel) and scaled (right panel) lateral dispersion of LPDM-B simulations as in Table 1; low density: light blue, high density (100 times denser than low density): dark red. The parameterisation $\hat{\sigma}_y^*(X^*)$ (cf. Eq. 18) is plotted as black line.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



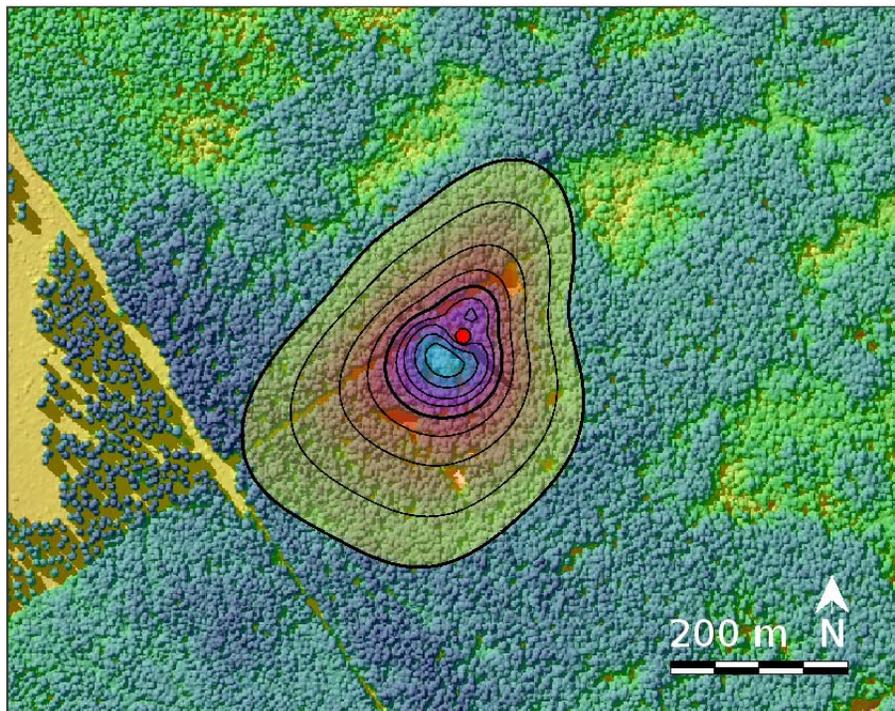


Figure 5. Example footprint climatology for the ICOS flux tower Norunda, Sweden, for 1–31 May 2011. The red dot depicts the tower location with a receptor mounted at $z_m = 12$ m. Footprint contour lines are shown in steps of 10% from 10 to 90%. The background map is tree height derived from an airborne LiDAR survey.

**Two-dimensional
parameterisation for
Flux Footprint
Predictions**

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

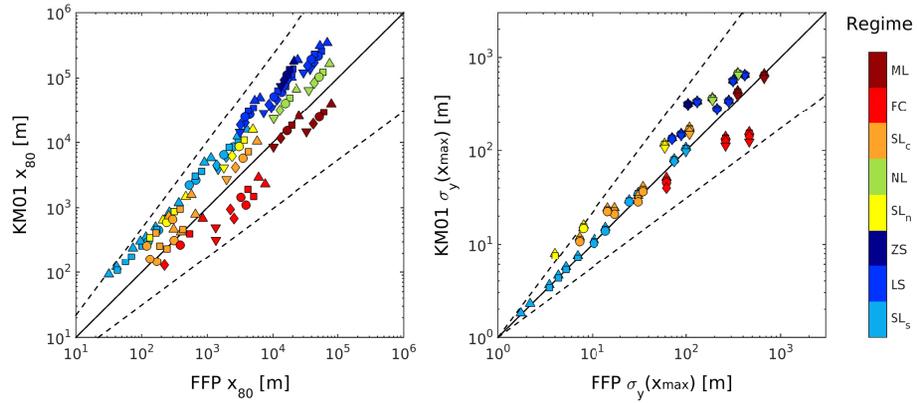


Figure 7. Same as Fig. 6 but for results of FFP compared with corresponding simulations of the model (KM01) of Kormann and Meixner (2001).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Two-dimensional parameterisation for Flux Footprint Predictions

N. Kljun et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

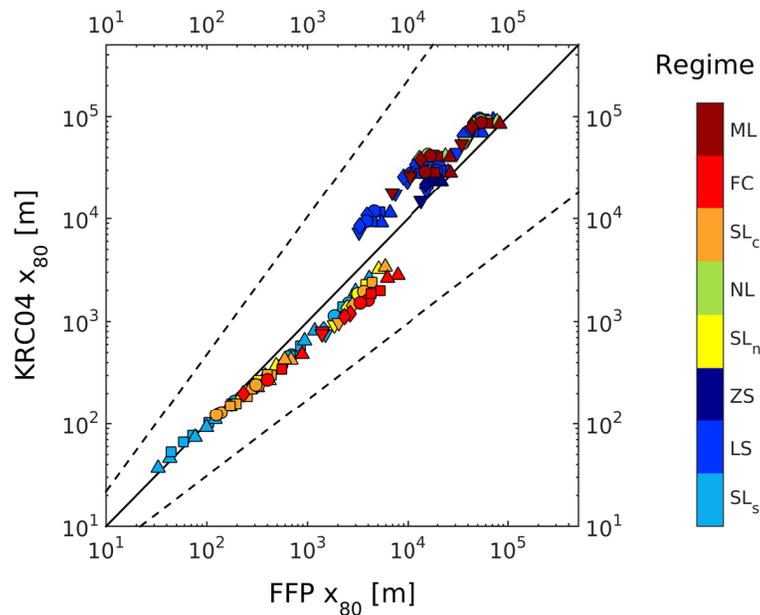


Figure 8. Comparison of FFP simulations for scenarios of Table 1 with corresponding simulations of the footprint parameterisation (KRC04) of Kljun et al. (2004b). Plotted is the extent of 80% crosswind-integrated footprints (x_{80}). The color depicts the stability regime of the simulation and symbols denote modelled roughness lengths (see Fig. 6 for details).